

2. AMENDMENT/MODIFICATION NO. 0002	3. EFFECTIVE DATE See Block 16C	4. REQUISITION/PURCHASE REQ. NO.	5. PROJECT NO. (If applicable)
--	---	----------------------------------	--------------------------------

6. ISSUED BY Contracting & Procurement General Services Office, American Embassy Manila Seafront Compound, Roxas Boulevard, Pasay City	7. ADMINISTERED BY (If other than Item 6) CODE
--	--

8. NAME AND ADDRESS OF CONTRACTOR (No., street, county, State, and ZIP Code)	(✓)	9A. AMENDMENT OF SOLICITATION NO. 19RP3821Q0022
	X	9B. DATED (SEE ITEM 11) 02/09/2021
		10A. MODIFICATION OF CONTRACT/ORDER NO.
		10B. DATED (SEE ITEM 13)
FACILITY CODE		

11. THIS ITEM ONLY APPLIES TO AMENDMENTS OF SOLICITATIONS

The above numbered solicitation is amended as set forth in Item 14. The hour and date specified for receipt of Offers --is extended, is not extended.

Offers must acknowledge receipt of this amendment prior to the hour and date specified in the solicitation or as amended, by one of the following methods:
 (a) By completing Items 8 and 15, and returning 1 copies of the amendment; (b) By acknowledging receipt of this amendment on each copy of the offer submitted; or (c) By separate letter of telegram which includes a reference to the solicitation and amendment numbers. FAILURE OF YOUR ACKNOWLEDGEMENT TO BE RECEIVED AT THE PLACE DESIGNATED FOR THE RECEIPT OF OFFERS PRIOR TO THE HOUR AND DATE SPECIFIED MAY RESULT IN REJECTION OF YOUR OFFER. If by virtue of this amendment you desire to change an offer already submitted, such change may be made by telegram or letter, provided each telegram or letter makes reference to the solicitation and this amendment, and is received prior to the opening hour and date specified.

12. ACCOUNTING AND APPROPRIATION DATA (If required)

13. THIS ITEM APPLIES ONLY TO MODIFICATIONS OF CONTRACTS/ORDERS, IT MODIFIES THE CONTRACT/ORDER NO. AS DESCRIBED IN ITEM 14.

(✓)	A.	THIS CHANGE ORDER IS ISSUED PURSUANT TO: (Specify authority) THE CHANGES SET FORTH IN ITEM 14 ARE MADE IN THE CONTRACT ORDER NO. IN ITEM 10A.
	B.	THE ABOVE NUMBERED CONTRACT/ORDER IS MODIFIED TO REFLECT THE ADMINISTRATIVE CHANGES (such as changes in paying office, appropriation date, etc.) SET FORTH IN ITEM 14, PURSUANT TO THE AUTHORITY OF FAR 43.103(b)
	C.	THIS SUPPLEMENTAL AGREEMENT IS ENTERED INTO PURSUANT TO AUTHORITY OF:
	D.	OTHER (Specify type of modification and authority)

E. IMPORTANT: Contractor is not, is required to sign this document and return 1 copy to the issuing office.

14. DESCRIPTION OF AMENDMENT/MODIFICATION (Organized by UCF section headings, including solicitation/contract subject matter where feasible.)

The purpose of this amendment is to make changes to the Scope of Work and Attachment 5 of the solicitation.

- Table of Contents, page 3 is hereby rescinded and replaced with the attached revised page 3. Please note that Attachment 5 is modified to delete and replace RESERVED with **DRAWING**. The revision is marked as 0002.
- Section I, page 23 is hereby rescinded and replaced with the attached revised page 23. Please note that Attachment 5 is modified to delete and replace RESERVED with **DRAWING**. The revision is marked as 0002.
- Attachment 5, page 45 is hereby rescinded and replaced with the attached revised page 45. Please note that Attachment 5 is modified to delete and replace RESERVED with **DRAWING**. The revision is marked as 0002.
- Attachment 6, page 46 is hereby rescinded and replaced with the attached revised page 46. The revision is marked as 0002.
- The submission/ quotation due date of **March 10, 2021, 4:00 p.m., local time**, remains unchanged.

All other terms and conditions remain unchanged and in full force and effect.

15A. NAME AND TITLE OF SIGNER (Type of print)	16A. NAME AND TITLE OF CONTRACTING OFFICER (Type or Print)
	JASON B. HASKINS
15B. CONTRACT/OFFEROR	16B. UNITED STATES OF AMERICA
(Signature of person authorized to sign)	(Signature of Contracting Officer)
15C. DATE SIGNED	16C. DATE SIGNED

TABLE OF CONTENTS

SF-1442 COVER SHEET

A. PRICE

B. SCOPE OF WORK

C. PACKAGING AND MARKING

D. INSPECTION AND ACCEPTANCE

E. DELIVERIES OR PERFORMANCE

F. ADMINISTRATIVE DATA

G. SPECIAL REQUIREMENTS

H. CLAUSES

I. LIST OF ATTACHMENTS

J. QUOTATION INFORMATION

K. EVALUATION CRITERIA

L. REPRESENTATIONS, CERTIFICATIONS, AND OTHER STATEMENTS
OF OFFERORS OR QUOTERS

ATTACHMENTS:

Attachment 1: Standard Form 25, "Performance and Guaranty Bond"

Attachment 2: Standard Form 25A, "Payment Bond"

Attachment 3: Sample Letter of Bank Guaranty

Attachment 4: Breakdown of Price by Divisions of Specifications

Attachment 5: Drawing

Attachment 6: Scope of Work

Attachment 7: OF174, Application for Employment as a Foreign National

Attachment 8: U.S. and Philippine Holidays

0002


I. LIST OF ATTACHMENTS

ATTACHMENT NUMBER	DESCRIPTION OF ATTACHMENT	NUMBER OF PAGES
Attachment 1	Standard Form 25, "Performance and Guaranty Bond"	2
Attachment 2	Standard Form 25A, "Payment Bond"	2
Attachment 3	Sample Bank Letter of Guaranty	1
Attachment 4	Breakdown of Price by Divisions of Specifications	1
<i>Attachment 5</i>	<i>Drawing</i>	<i>1</i>
Attachment 6	Scope of Work	2
Attachment 7	OF174, Application for Employment as a Foreign National	4
Attachment 8	U.S. and Philippine Holidays	1

0002

ATTACHMENT 5
DRAWING
(1 page)

0002

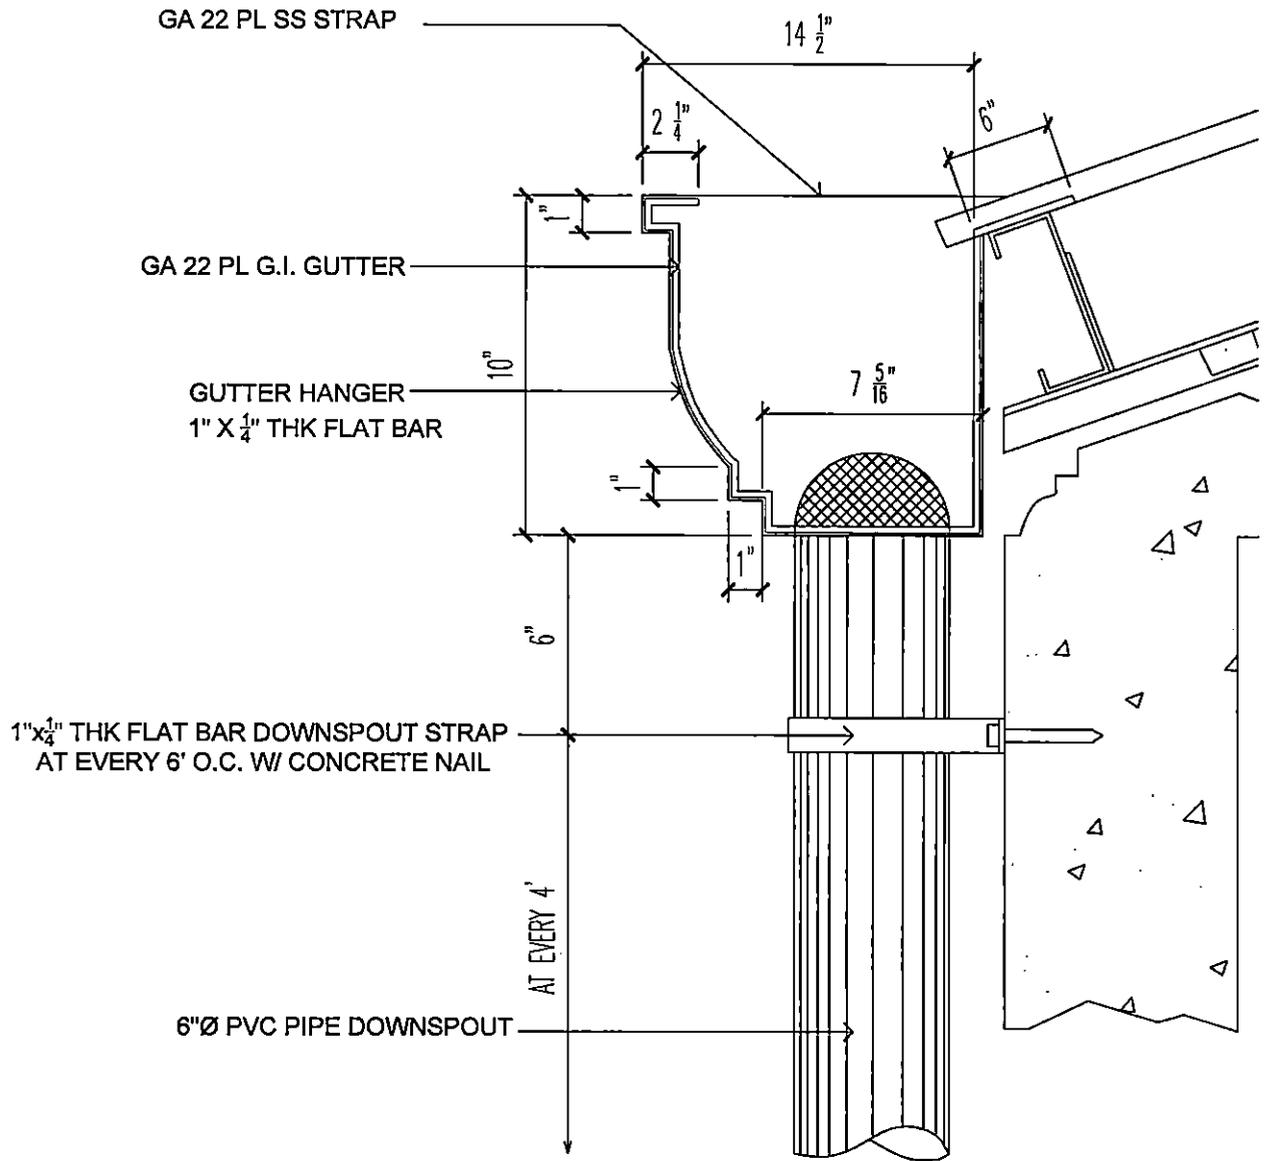

ROOF GUTTER DETAIL
SCALE 1:4 MTS

NOTE: USG TO SUBMIT ACTUAL SAMPLE OF GUTTER

**ATTACHMENT 6
SCOPE OF WORK
(2 pages)**

0002

PROJECT: Repair of Chancery Courtyard Roof Gutter and Green Roof

Location: Chancery Compound

Subject: Scope of Work

A. SUMMARY

This work involves the following:

- Installation of scaffolding system
- Removal and replacement of existing gutter
- Removal and replacement of existing waterproofing membrane at green roof
- Removal/Reinstallation of tile roof and replacement of existing substrate and frame under the tile roof
- Repainting of eaves and fascia board

B. PROJECT DESCRIPTION

I. INSTALLATION OF SCAFFOLDING SYSTEM

- Scaffoldings shall be used to support the operation. Shop drawings and calculations for scaffolding system shall be submitted for review before any work started.
- Scaffolding system shall be prepared to meet EM 385 standards.

II. REMOVAL and REPLACEMENT OF EXISTING GUTTER

- The contractor shall remove existing gutter around the courtyard.
- Existing canvass roofing shall be partially rolled to certain distance for ease of mobility and to prevent damage to the canvass during construction. Canvass roofing shall reinstall to original location after completion of operation.
- New roof gutters shall be installed per detailed drawings.
- ***The total linear meter of the gutter for the Tegula roof tiles is approximately 138 linear meters.***
- ***Refer to Attachment 5, Drawing, for the gutter detail.***

0002

III. REMOVAL and REPLACEMENT OF EXISTING WATERPROOFING MEMBRANE AT GREEN ROOF

- The contractor shall remove existing waterproofing membrane including all mastic/glue/primer and other accessories of the system. Substrate shall be prepared as per new waterproofing product's preparation/application standard procedure.
- Termination bar and flashing/counterflashing shall be installed at the top edge of membrane.
- The contractor shall install flashing around all utilities that penetrates roof surface.
- New waterproofing system shall be cold applied and applicable to the existing substrate.
- Submit product data of cold-applied waterproofing system including shop drawings of flashing/counterflashing and penetration treatment for review and acceptance.
- ***The total area of the waterproofing membrane/ green roof is approximately 108 square meters.***

0002

SCOPE OF WORK

REPAIR OF CHANCERY COURTYARD ROOF GUTTER AND GREEN ROOF

IV. REMOVAL/REINSTALLATION OF TILE ROOF AND REPLACEMENT OF EXISTING SUBSTRATE AND FRAMES UNDER THE TILE ROOF

- The contractor shall carefully remove and clean the existing tile roof and re-install after completion of new substrate and frames. Existing wood/metal sheet substrate and purlins shall be removed and replaced.
- Removal of tile roof shall be done in phasing to minimize exposure of the area to the weather. If necessary, a temporary covering shall be installed.
- All broken roof tile shall be replaced.
- The contractor shall remove existing concrete flashing and replace with new flashing as part of new waterproofing system.

V. REPAINTING OF EAVES AND FASCIA BOARDS

- The contractor shall repaint existing fascia board before installation of new roof gutter. Eaves and frames/supports shall be painted, matching the existing color.
- ***The contractor shall repair or replace all eaves and fascia board found deteriorated as needed.***

0002

C. PROJECT SECURITY

- Contractor will be required to limit access to the construction site through the Service Compound Access Control (SCAC) located at the North-East side of the Chancery compound. No workers will be allowed to enter the compound without the "Embassy escort".
- All electronic media are not allowed.
- Workers will undergo vetting procedure. Workers will submit NBI, police and barangay clearances. Accomplished biographical data. Process will take 2-3 weeks upon submission of complete and accurate requirements. Access request (personnel and vehicles) shall be submitted 48 hours before the access day.
- No smoking on site.
- Official working hours shall be 7:30am to 4:30pm Monday to Friday. Overtime is allowed on Saturday upon request.
- Worker's drinking water shall be provided by the contractor.
- Restroom will be provided by FAC.
- Contractor shall strictly follow DPWH guidelines on the construction of infrastructure projects amid covid-19 crisis and whenever arises.

D. LIMIT OF CONSTRUCTION

The contract includes:

- Repair of all disturbed/affected areas outside the contract limit shall meet or exceed the pre-contract condition.

E. PROJECT DURATION

- The project shall be completed **within 60 working days** from issuance of "notice to proceed".

SCOPE OF WORK

REPAIR OF CHANCERY COURTYARD ROOF GUTTER AND GREEN ROOF

2 | Page